



Aluminum Lite Seal

To close


- 01 Pass the nylon sealing thread through the object to be sealed, and insert the end of the thread inside the "A" orifice and spin it to both sides, in order to activate the locking system.

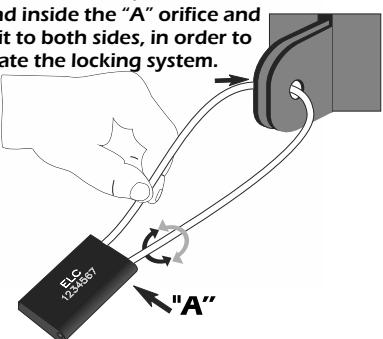

- 02 Pull the end of the nylon thread until it is totally tight.

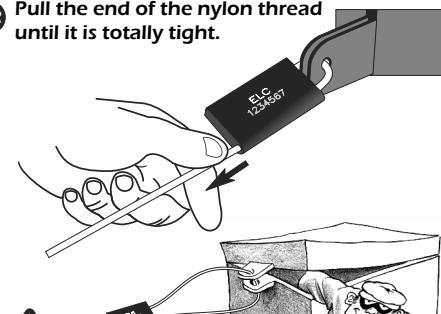


- 03 Confirm the locking by pulling it as the picture shows.

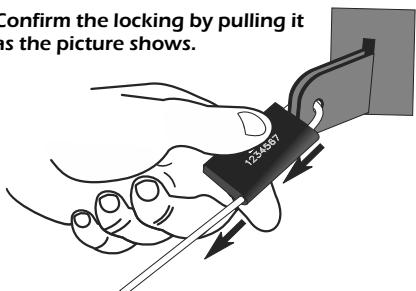

If it does not lock,
please, replace the seal.

- 04 Cut the remaining nylon thread near the closure.

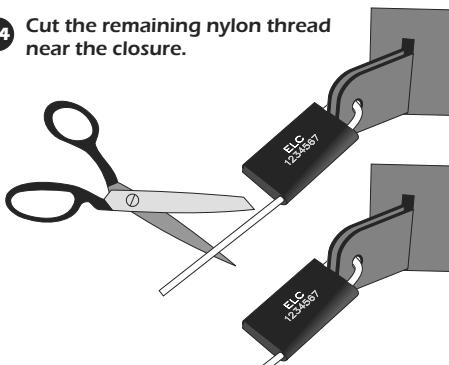


To open

Use the scissors to remove it, cutting the nylon thread far from the closure.



Protocol of Sealing Disposal

Please, keep the seal until the end of the checking. Losing a seal will make the person responsible for checking guilty in case of irregularity. If any irregularities are reported, please, call the police. If it is possible, the sealed object should accompany the seal used. If there are no irregularities, the used seal should be destroyed.



Important Information

If requested, ELC is able to provide technical assistance to substantiate the work of official public experts. ELC is not responsible for the incorrect use of this product.




The closure without observing the rules will make the operator responsible for further occurrences.


Lacre Alulock Lite

Para fechar

- 01** Passe o fio de nylon no objeto a ser lacrado, enfeie a ponta no orifício "A" do lacre e gire para ambos os lados afim de ativar o sistema de travas.

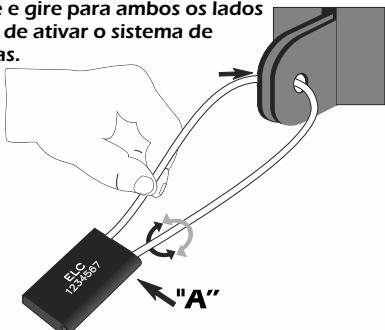

- 02** Puxe a ponta do fio de nylon até completo aperto.

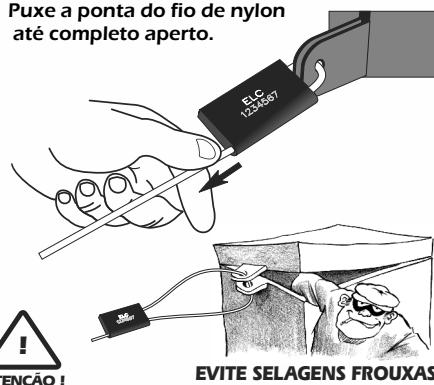


- 03** Confirme o travamento do lacre puxando-o conforme ilustração.



Não havendo travamento, substitua o lacre.

- 04** Corte o excesso do fio de nylon próximo ao lacre.

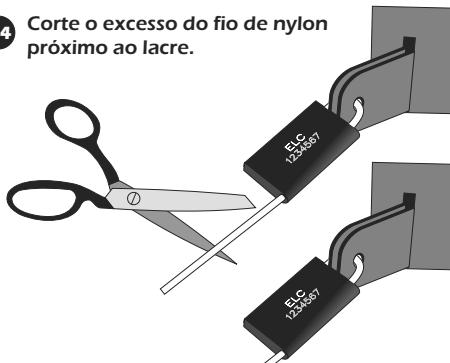

Para abrir

Utilize uma tesoura para remover, cortando o fio de nylon bem afastado do lacre.



Protocolo de descarte dos lacres

Guarde o lacre até o final da conferência. A perda do lacre tornará os conferentes responsáveis no caso de irregularidade. Em caso de qualquer irregularidade, chame a perícia. Sempre que possível, o objeto selado deverá acompanhar o lacre usado. Não havendo irregularidade, o lacre usado deve ser destruído.



IMPORTANTE

Quando solicitada, a ELC presta serviço de assistência técnica para fundamentar o trabalho de peritos de fé pública.

A ELC não é responsável pelo uso incorreto deste produto.



O fechamento sem observação das regras tornará o operador responsável pelas ocorrências posteriores.